

TPR DUCTING

Constructed from a Thermo Plastic Rubber compound with a steel spiral helix. TPR is a good choice multipurpose ducting with excellent flexibility, U.V and abrasive resistant characteristics. TPR also has good resistance to many chemicals and oils.

Temperature Range: -50 - 120°C




I.D. (mm)	COIL (m)	PART #	CUT
38	10	PD-TR038	✓
50	20	PD-TR050	✓
57	10	PD-TR057	✓
63	20	PD-TR063	✓
75	20	PD-TR075	✓
90	10	PD-TR090	✓
100	15	PD-TR100	✓
115	10	PD-TR115	✓
125	15	PD-TR125	✓
140	10	PD-TR140	✓
150	15	PD-TR150	✓
160	10	PD-TR160	✓
180	15	PD-TR180	✓
200	10	PD-TR200	✓
230	10	PD-TR230	✓
250	10	PD-TR250	✓
300	10	PD-TR300	✓

POLYURETHANE ANTI-STATIC DUCTING

PU-AS is a light weight and flexible product that can be used as both a duct and a vacuum/delivery hose. Made from abrasion resistant polyurethane with copper wire helix, applications include suction and discharge of powders, dust, fumes, shavings and light duty industrial and abrasive applications. PU-AS is suitable for food contact in dry applications.

Temperature Range: -20 - 80°C

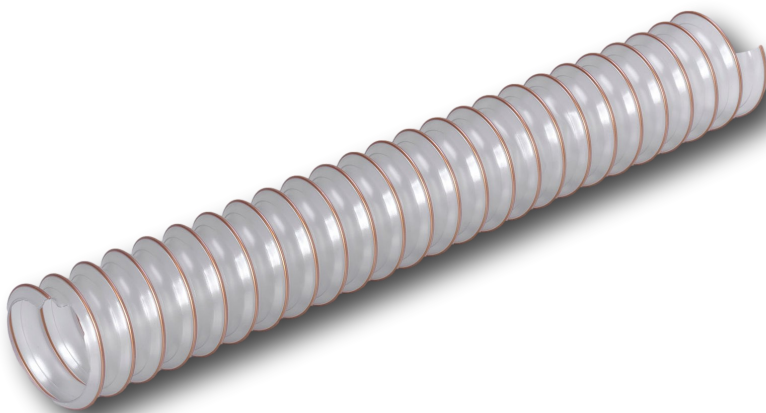

I.D. (mm)	COIL (m)	PART #	CUT
38	10	PD-PA038	✓
50	10	PD-PA050	✓
63	10	PD-PA063	✓
75	10	PD-PA075	✓
100	10	PD-PA100	✓
115	10	PD-PA115	✓
125	10	PD-PA125	✓
140	10	PD-PA140	✓
150	10	PD-PA150	✓
160	10	PD-PA160	✓
180	10	PD-PA180	✓
200	10	PD-PA200	✓
230	10	PD-PA230	✓
250	10	PD-PA250	✓
300	10	PD-PA300	✓