










## STORZ FITTINGS

SIZE						
Storz (in)	Tail/Thread (in)	Hose Tail	BSP Male	BSP Female	Blanking Cap w/ Chain	Spanner
1	3/4	IF-STZ025-020H	IF-STZ025-020M	IF-STZ025-020F		
1	1	IF-STZ025H	IF-STZ025M	IF-STZ025F	IF-STZ025C	IF-STZSP025
1 1/2	1 1/2	IF-STZ038H	IF-STZ038M	IF-STZ038F	IF-STZ038C	IF-STZSP063
2	2	IF-STZ050H	IF-STZ050M	IF-STZ050F	IF-STZ050C	IF-STZSP063
2 1/2	1 1/2	IF-STZ063-038H	IF-STZ063-038M	IF-STZ063-038F		
2 1/2	2	IF-STZ063-050H	IF-STZ063-050M	IF-STZ063-050F		
2 1/2	2 1/2	IF-STZ063H	IF-STZ063M	IF-STZ063F	IF-STZ063C	IF-STZSP063
3	3	IF-STZ075H	IF-STZ075M	IF-STZ075F	IF-STZ075C	IF-STZSP075
4	4	IF-STZ100H	IF-STZ100M	IF-STZ100F	IF-STZ100C	IF-STZSP100
5	5	IF-STZ125H		IF-STZ125F	IF-STZ125C	
6	6	IF-STZ150H	IF-STZ150M	IF-STZ150F	IF-STZ150C	IF-STZSP150


## FIRE FITTINGS - CFA 2-1/2in x 3 TPI

SIZE					
Tail/Thrd. (in)	CFA Female x Hose Tail	CFA Female x BSP Female	CFA Female x BSPT Male	CFA Male x Hose Tail	CFA Male x BSPT Male
1 1/2	IF-CFAF038H	IF-CFAF038FB	IF-CFAF038MB	IF-CFAM038H	IF-CFAM038MB
2	IF-CFAF050H	IF-CFAF050FB	IF-CFAF050MB	IF-CFAM050H	IF-CFAM050MB
2 1/2	IF-CFAF063H	IF-CFAF063FB	IF-CFAF063MB	IF-CFAM063H	IF-CFAM063MB
3	IF-CFAF075H	IF-CFAF075FB	IF-CFAF075MB	IF-CFAM075H	IF-CFAM075MB

## FIRE FITTINGS - MFB 2-1/2in x 5 TPI

SIZE				
Tail/Thrd. (in)	MFB Female x Hose Tail	MFB Female x BSP Female	MFB Male x Hose Tail	MFB Male x BSPT Male
1 1/2	IF-MFBF038H	IF-MFBF038FB	IF-MFBM038H	IF-MFBM038MB
2	IF-MFBF050H	IF-MFBF050FB	IF-MFBM050H	IF-MFBM050MB
2 1/2	IF-MFBF063H	IF-MFBF063FB	IF-MFBM063H	IF-MFBM063MB
3	IF-MFBF075H	IF-MFBF075FB	IF-MFBM075H	IF-MFBM075MB

## STANDPIPES

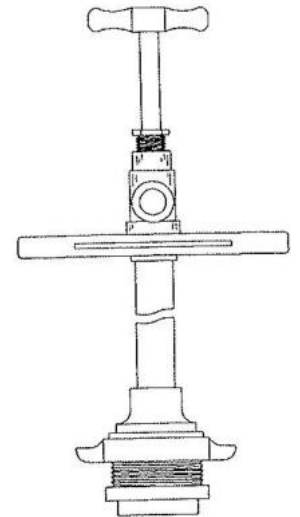

STANDPIPES  
ALSO  
AVAILABLE





# BAUER TYPE COUPLINGS







## BAUER TYPE COUPLINGS

Bauer Type Couplings are quick action fittings with four parts - the male ball, closure ring, female socket & sealing ring.

A single movement engages and locks the coupling, compressing the sealing ring to ensure a leakproof joint under either suction or delivery applications. The spherical construction of the ball and socket ensures the seal is equally efficient at coupling angles up to 30°.

SIZE						
Nominal (in)	Nominal (mm)	Ball O.D (mm)	Bauer Type Male x Hose Tail	Bauer Type Female x Hose Tail	Closure Ring	Sealing Ring
2	50	70	IF-BCG050MH	IF-BCG050FH	IF-BCG050CR	IF-BCG050CS
3	75	98	IF-BCG075MH	IF-BCG075FH	IF-BCG075CR	IF-BCG075CS
4	100	144	IF-BCG100MH	IF-BCG100FH	IF-BCG100CR	IF-BCG100CS
6	150	180	IF-BCG150MH	IF-BCG150FH	IF-BCG150CR	IF-BCG150CS
8	200	230	IF-BCG200MH	IF-BCG200FH	IF-BCG200CR	IF-BCG200CS

SIZE						
Nominal (in)	Nominal (mm)	Ball O.D (mm)	Bauer Type Female x Table D Flange	Bauer Type Male x Table D Flange (inc. closure ring)	Bauer Type Female x BSP Male	Bauer Type Male x BSP Male
4	100	144	IF-BCG100FF	IF-BCG100MF	IF-BCG100FB	IF-BCG100MB
6	150	180	IF-BCG150FF	IF-BCG150MF	IF-BCT150FB	IF-BCG150MB
8	200	230	IF-BCG200FF	IF-BCG200MF	IF-BCG200FB	IF-BCG200MB